


RCA Female to F-Type Female Module

PRODUCT SPECIFICATION

Package includes:

A. RCA Female to F-Type Female Module, 1 pc

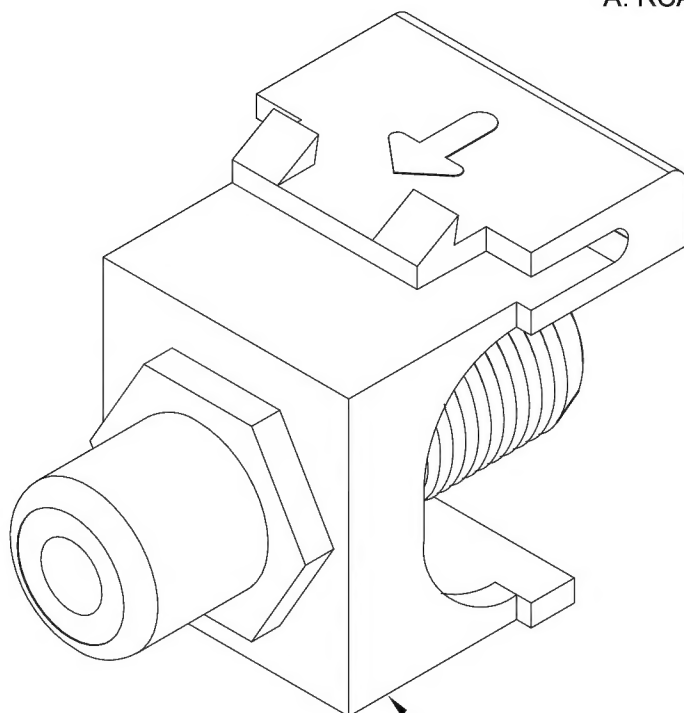

—RCA Female to F-Type Female Module

Features and Benefits:

- Gold plating for improved performance with superior signal quality with minimal noise
- Used for audio and video applications
- Colored insulators providing for quick and easy identification of the type of signal carried on the circuit, making it easy to separate audio and video signals
- Available with black, blue, green, red, white, and yellow insulators
- Rear threaded F-Type connectors for secure in-wall connections with both RG6 and RG59 coaxial cables
- Provides a clean and neat appearance installation
- Compatible with all IC107 faceplates, inserts, surface mount boxes, and blank patch panels
- Compatible with all IC108 furniture faceplates, bezels, and surface mount boxes
- Housing color available in almond, black, ivory, and white

MODULE, RCA F-TYPE

ITEM NO. IC107ZFGXX


REV. C

DWG NO. PS1070FG00

PAGE NO. 1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com

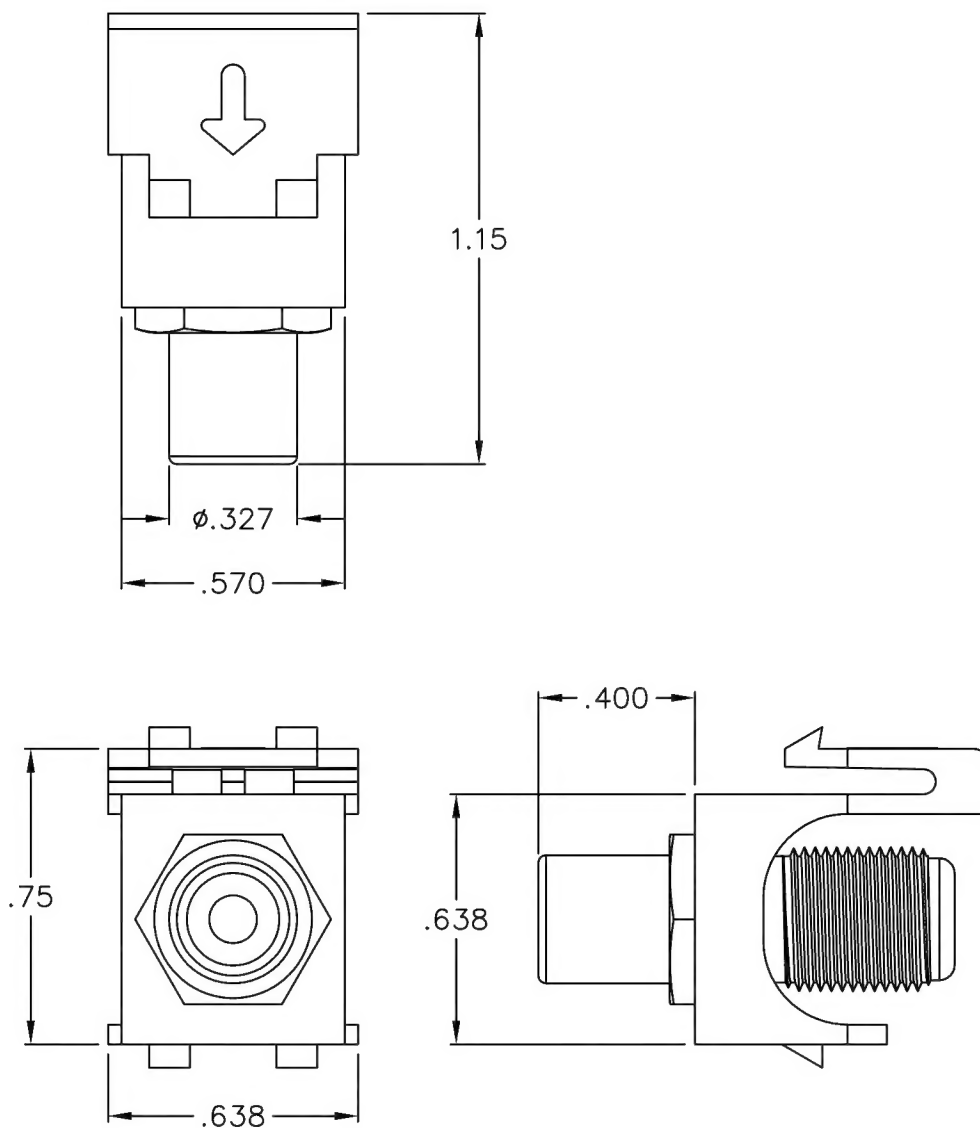

NOTE: UNLESS OTHERWISE SPECIFIED

1. HOUSING:

- A. MATERIAL: ABS, UL 94V-0
- B. COLOR: XX: AL-ALMOND, BK-BLACK, IV-IVORY, & WH-WHITE

2. CONNECTOR:

- A. BODY: BRASS WITH FLASH GOLD PLATING
- B. INSULATION: PP
- C. CONTACT: BRASS WITH FLASH NICKEL PLATING

3. ELECTRICAL:

- A. CONTACT RESISTANCE: 30M OHM MAX.
- B. INSULATION RESISTANCE: 100M OHM MIN @ 500V DC
- C. DIELECTRIC STRENGTH: 500 VOLTS FOR ONE MINUTE

4. MECHANICAL:

- A. THREAD: 3/8-32

MODULE, RCA F-TYPE

ITEM NO. IC107ZFGXX

REV. C

DWG NO. PS1070FG00

PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com